



DECO LED UP FLAME

Typology

Immediate retro-fit of incandescent lamps, perfect replacement of opal incandescent lamps, no more available on the European market.

Features

Uniformly diffused lighting on the axes.

Material


The body of the lamp is in termoconductive material to optimise heat dissipation; ultralight cover.

Beam

240° - Antiglare opal finish of the lamp cover.

Notes


Disponibili su richiesta in version 110-132V AVAILABLE UPON REQUEST.



Characteristic data

Power	3.2 W	Beam	240°	Dimmable	No	Input	220-240 Vac
Base	E14	IP	20	Flux	270 lm	PF	0,4
Tc	3000 K	Ra	>80	LED Warranty	G2		

Dimensional characteristics



Ø	37 mm
H	133 mm
H Tolerance	± 3 mm


Lighting and photometric features

Beam opening	240°
Flux	270 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	20000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

Electrical characteristics

Rated power	3.2 W
Input voltage	220-240 Vac
Frequency	50 Hz
Dimmable	No
Power factor (PF)	0,4
Weighted energy consumption	3 kWh/1000h
Number of cycles	100000
Operating temperature	-25°C / +35°C
Equivalence with incandescent lamp	26
Operating position	360°

Spectrometry

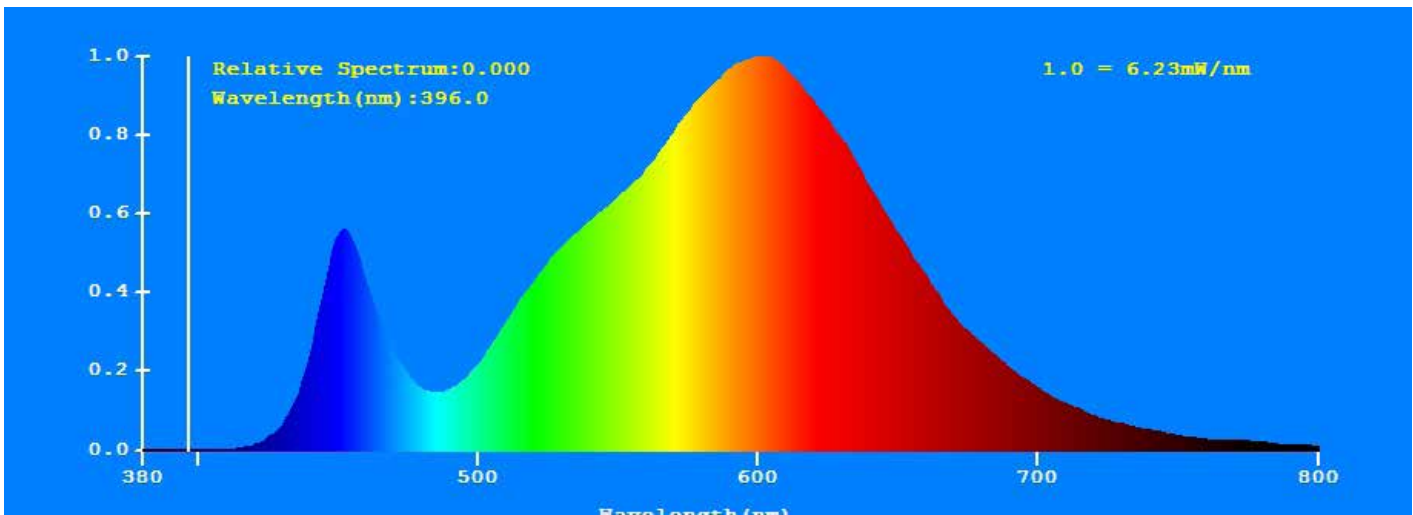

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC (Compatibilità Elettromagnetica)
 2014/35/EU * LVD (Bassa Tensione)
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60968:2016
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62560:2013 (+A1:2017/+A11:2020)
 CEI 34-141:2014

Logistics data

Item net weight	24 gr
Barcode single item	8011905836948
Number of pieces multiple pack	10
Barcode multiple pack	8011905782221