



DECO LED UP ROUND - E14

Typology

Immediate retro-fit of incandescent lamps, perfect replacement of opal incandescent lamps, no more available on the European market.

Features

Uniformly diffused lighting on the axes.

Material

The body of the lamp is in termoconductive material to optimise heat dissipation; ultralight cover.

Beam

240° - Antiglare opal finish of the lamp cover.

Notes


Disponibili su richiesta in version 110-132V AVAILABLE UPON REQUEST.

| | | | | | | | | | |
|----------------|--------|--|--|---------|------|-----|----------------|--|--|
| 220-240 Vac | Ra >80 | | | 20000 h | IP20 | E14 | -25°C +35°C | | |
| G2 | | | | | | | | | |

Characteristic data

| | | | | | | | |
|-------|--------|------|------|--------------|--------|-------|-------------|
| Power | 3.2 W | Beam | 240° | Dimmable | No | Input | 220-240 Vac |
| Base | E14 | IP | 20 | Flux | 270 lm | PF | 0,4 |
| Tc | 3000 K | Ra | >80 | LED Warranty | G2 | | |

Dimensional characteristics



| | |
|-------------|--------|
| Ø | 45 mm |
| H | 79 mm |
| H Tolerance | ± 3 mm |


Lighting and photometric features

| | |
|---|--------------------|
| Beam opening | 240° |
| Flux | 270 lm |
| CCT nominal colour temperature | 3000 K |
| Colour of the light | Warm light |
| Colour rendering index | >80 |
| Lifespan | 20000 h |
| LED lifespan | L70B50 |
| Trigger time | <0,2 s |
| Heating time up to 60% of full efficiency | Instant Full Light |
| Mercury | 0 mg |

Electrical characteristics

| | |
|------------------------------------|---------------|
| Rated power | 3.2 W |
| Input voltage | 220-240 Vac |
| Frequency | 50 Hz |
| Dimmable | No |
| Power factor (PF) | 0,4 |
| Weighted energy consumption | 3 kWh/1000h |
| Energy efficiency class | G |
| Number of cycles | 100000 |
| Operating temperature | -25°C / +35°C |
| Equivalence with incandescent lamp | 26 |
| Operating position | 360° |

Spectrometry

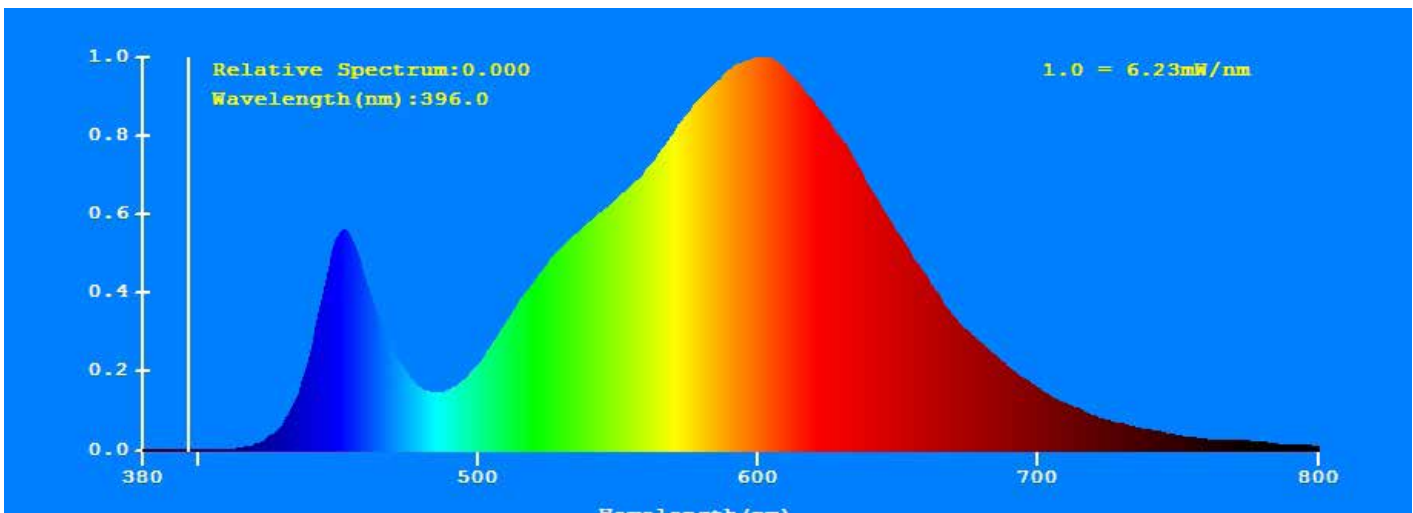

LED Warranty

| | |
|----|--|
| G2 | Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions. |
|----|--|

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC (Compatibilità Elettromagnetica)
 2014/35/EU * LVD (Bassa Tensione)
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60968:2016
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62560:2013 (+A1:2017/+A11:2020)
 CEI 34-141:2014

Logistics data

| | |
|--------------------------------|---------------|
| Item net weight | 21 gr |
| Barcode single item | 8011905836436 |
| Number of pieces multiple pack | 10 |
| Barcode multiple pack | 8011905781712 |